

1, The Specialty of our 100% TPE Foam as below:

Odorless and Non-toxic

Does not contain plasticizer and toxic chemical and comply with product safety regulation of EN71, REACH, ROHS and CNS 15493

Sustainable and Recyclable

Light weightiness: specific gravity < 0.1

Light Weightiness

Elastic

Ductile

Good Cold-Resistance (-40 degree C)

Can be Colorful

Cozy

The comfort mat product is ductile, which in not only provide yoga mat user with safety protection, but a comfortable environment for exercising

Anti-Skid

Due to the nature of 100% TPE foam, 100% TPE foam yoga mat is extremely anti-skid, which prevents the slippy floor during toga exercise

Easy to clean

Simply clean by clear water or mild detergent

Lightness

Each TPE yoga mat has weight only 2.6lb (1.2kg), easy to carry

Texture Option

The Yoga mat comes one side with "Mold Texture" and the other side can be either with "Embossed Texture" or "smooth surdace".

Xingya currently has 5 type mold texture and 1 type embossed texture for your choice. If you do have your desire texture or your own design. We are able to customize the texture per your request

Mold Texture:

- Hemp rope
- Leather
- Tri-line
- Dot
- Lychee



Hemp rope Texture



Leather Texture



Tri-line Texture



Dot Texture




Lychee Texture

Embossed Texture:  
- Snow Flake



Snowflake

2, Pictures:

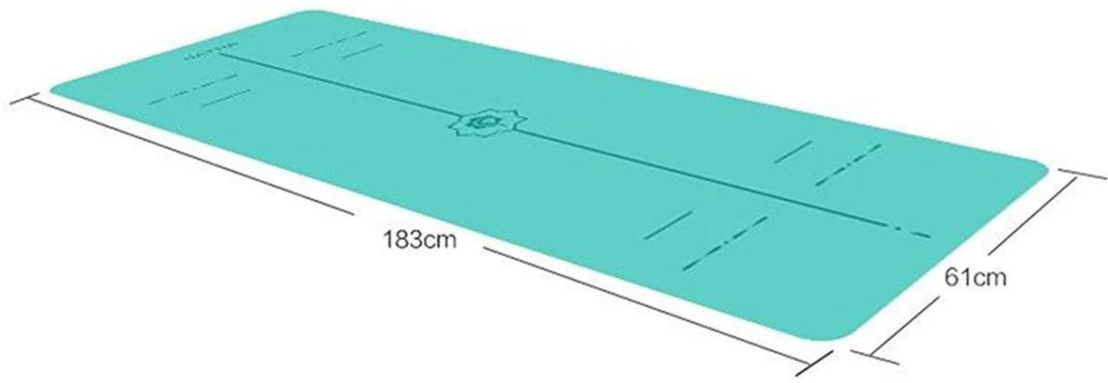





**Comparison of different material for yoga mat**

<b>Material</b> <b>Property</b>	<b>Rubber</b>	<b>PVC</b>	<b>EVA/PE</b> <b>(Market product)</b>	<b>PU</b>	<b>Komat</b> <b>100% TPE</b>
<b>Cell Structure</b>	Open	Close	Close	Open	Close
<b>Density</b>	0.4 – 0.5	0.1	0.1	0.1	0.1
<b>Smell</b>	Smell of sulfur	Smell of Plasticizer	Smell of Ammonia	Odorless	Odorless
<b>Elasticity</b>	Good	Fair	Poor	Fair	Excellent
<b>Recyclability</b>	Poor	Poor	Poor	Poor	Excellent
<b>Cold Resistance</b>	Excellent	Poor	Poor	Poor	Excellent (-40 °C)
<b>Color Multiplicity</b>	Poor	Good	Good	Good	Excellent
<b>Degradibility</b>	Good	Poor	Poor	Good	Excellent
<b>Heavy Metal content</b>	No	Yes	No	No	No
<b>Secondary Sizing operation</b>	Poor	Good	Good	Poor	Good
<b>Surface Smoothness</b>	Rough	Smooth	Smooth	Smooth	Smooth
<b>Ease of applying pose production</b>	Poor	Good	Good	Poor	Good
<b>Hardness (Asker C)</b>	> 50	> 30	> 35	< 15	10 – 30 (customizable)
<b>Aging test</b>	Poor	Poor	Good	Poor	Good
<b>Low Temp. Performance</b>	Good	Poor	Good	Poor	Excellent

<b>Material</b>	<b>Institution</b>	<b>Inspection item</b>	<b>Standard</b>	<b>Result</b>	<b>Report number</b>
EVA foam	SGS	Formamide (2ppm)	French decree of July 20 2011 CNS 15493	Pass	CY_2012_30925A
		PAHs	CNS 3478	Pass	UG_2012_B0128A01
		Azo	CNS 15205	Pass	UG_2012_B0128A01
		Heavy metal	ASTM F963-11	Pass	UG_2012_B0128A01
		Phthalates	CNS 15138	Pass	UG_2012_B0128A01
		Formaldehyde emission	CNS 1349	Pass	UG_2012_B0128A01
		flammability	UL94	Pass	HL40344_2015
TPE foam	SGS	Plasticizer	CNS 15138	Pass	UG_2014_70199
		Heavy metal	CNS 15493	Pass	UG_2014_70199
		Tear strength of dual-layer mat		OK	TV-15-00173X
	foot wear & recreation research institution	Hydrolysis	5% NaOH, 23C, 24Hrs	Pass	485464923606-A01

**3,Package and Delivery**

Package:Regularly one piece into a poly-bag, then about 20kg into a carton, finally about 1000kg into a wooden case/pallet

Delivery: Warehouse stock products with in 7days; Others within 20 workdays

Transport by sea, international express, or by plane.